



Arclux Mini

8 373 063 009

2 × 2 W, 101 lm, blue

Window reveal luminaire 6° / 180°

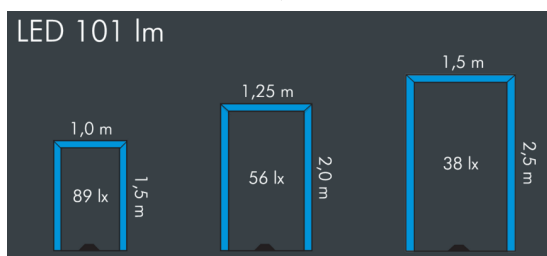

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, 4 holes Ø 6 mm, spacing 200 mm x 88 mm, cable gland: M20, connecting terminal: 3 pole, high-end optical system with specially designed reflectors achieve a uniform arch of light, integral driver (AC/DC), max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 101 lm, wattage: 4 W, delivered lumens 25 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions (L×H×W): 230 × 59 × 105 mm, weight 1.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



 IP 67 IK 08

Specification

Wattage	4 W	Housing colour	white RAL 9002
Delivered lumens	25 lm/W	Power supply cable	Ø 6 – 13 mm
Light source	LED blau	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Dimensions	230 × 59 × 105 mm
Input voltage AC	100 – 240 V	Weight	1,10 kg
Input voltage DC	195 – 240 V	Max. ambient temperature ta	45°
Voltage protection	2 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	50 / 85		