



Arlux

8 374 069 009

2 × 6 W (max. 12 W), 105 lm,
RGBW (3000 K) warm white, DMX,
Window reveal luminaire 10° / 180°

LED RGBW max. 106 lm

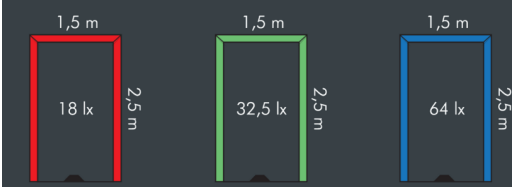

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, 2 drilled holes Ø 6 mm, spacing 259 mm, 4 × M6 grub screws to offset inclined surfaces, cable gland: 2 × M20, connecting terminal: 9 pole, high-end optical system with specially designed reflectors achieve a uniform arch of light, integral DMX 512 addressable driver, max 2 SCDM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 10° / 180°, luminous flux: 105 lm, wattage: 12 W, delivered lumens 9 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions (L×H×W): 125 × 70 × 270 mm, weight 1.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

Specification

Wattage	12 W	Beam angle (FWHM)	10° / 180°
Delivered lumens	9 lm/W	Housing colour	white RAL 9002
Light source	LED RGBW (3000 K)	Power supply cable	Ø 6 – 13 mm
Colour tolerance	max 2 SCDM	Protection type	IP67
Lifetime ta 25° C	L90/B10 > 50.000 h	Protection class	I
Control gear	DMX	Impact resistance	IK08
Input voltage AC	85 – 264 V	Dimensions	125 × 70 × 270 mm
Input voltage DC	120 – 370 V	Weight	1,60 kg
		Max. ambient temperature ta	40°