



Arlux

8 375 065 009

2 × 6,5 W, 977 lm, 4000 K neutral white,
Window reveal luminaire 12° / 180°

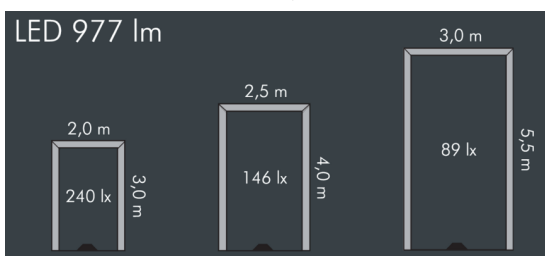

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, 2 drilled holes Ø 6 mm, spacing 259 mm, 4 × M6 grub screws to offset inclined surfaces, cable gland: 2 × M20, connecting terminal: 3 pole, high-end optical system with specially designed reflectors achieve a uniform arch of light, integral driver (AC), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 12° / 180°, luminous flux: 977 lm, wattage: 13 W, delivered lumens 73 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions (L×H×W): 270 × 70 × 125 mm, weight 1.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|-------------------|
| Wattage | 13 W | Beam angle (FWHM) | 12° / 180° |
| Delivered lumens | 73 lm/W | Housing colour | white RAL 9002 |
| Light source | LED 4000 K | Power supply cable | Ø 6 – 13 mm |
| Color Rendering Index | CRI > 80 | Protection type | IP67 |
| Colour tolerance | max 2 SDCM | Protection class | I |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Impact resistance | IK08 |
| Control gear | on / off | Dimensions | 270 × 70 × 125 mm |
| Input voltage AC | 198 – 264 V | Weight | 1,60 kg |
| Input voltage DC | 176 – 276 V | Max. ambient temperature ta | 35° |
| Voltage protection | 2 kV L/N 2 kV L/PE | | |
| Luminaires per B16A / C16A | 50 / 50 | | |