
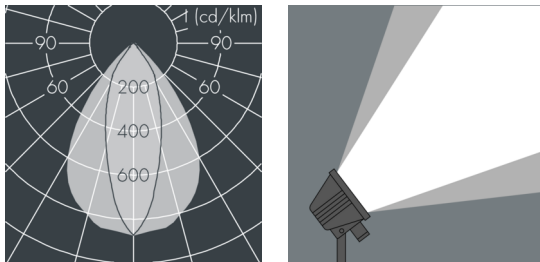


## Halogen floodlight

8 509 061 009

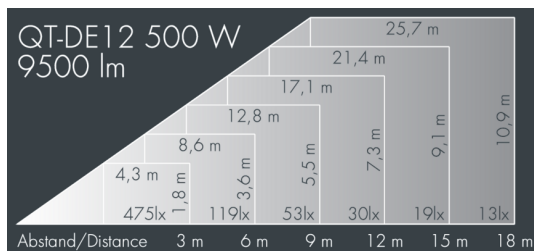

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, stainless steel release fastener, mounting bracket hot dipped galvanized steel, 2 holes  $\varnothing$  9 mm, spacing 70 mm, 1 centre hole  $\varnothing$  10.5 mm, tilt range: 100°, cable gland: PG13,5, connecting terminal: 3 pole, axially symmetrical aluminum reflector, Beam angle (FWHM): 34°, luminous flux: 9500 lm, wattage: 500 W, delivered lumens 19 lm/W, protection type IP55, protection class I, impact resistance IK07, dimensions (L×H×W): 210 × 110 × 245 mm, weight 1.54 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 55 IK07

## Specification

Wattage	500 W	Beam angle (FWHM)	34°
Delivered lumens	19 lm/W	Housing colour	white RAL 9002
Control gear	on / off	Power supply cable	$\varnothing$ 5 – 13 mm
		Protection type	IP55
		Protection class	I
		Impact resistance	IK07
		Dimensions	210 × 110 × 245 mm
		Weight	1,54 kg