



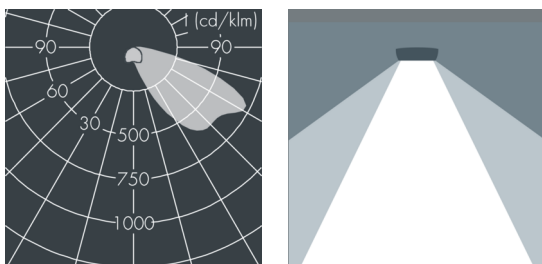

## Metaspaces

8 215 342 189

24 × max. W27 W, 2091 lm,  
2200 K – 3000 K tunable white DALI,  
asymmetrical wide beam

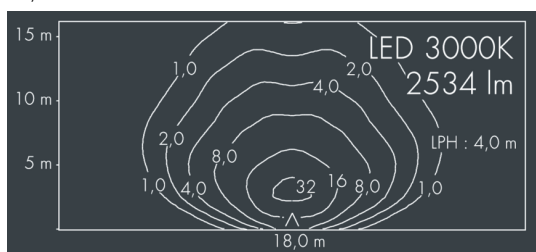

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification

|                       |                     |                   |                        |
|-----------------------|---------------------|-------------------|------------------------|
| Wattage               | 27 W                | Housing colour    | black RAL 7021         |
| Delivered lumens      | 76 lm/W             | Protection type   | IP65                   |
| Light source          | LED 2200 K – 3000 K | Protection class  | I                      |
| Color Rendering Index | CRI > 80            | Impact resistance | IK08                   |
| Control gear          | DALI                | Dimensions        | Ø 376 mm, width 112 mm |
|                       |                     | Weight            | 5,10 kg                |

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, with 8 m cable Ho7RN-F5G1, connecting terminal: 5 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, luminous flux: 2091 lm, wattage: 27 W, delivered lumens 76 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions: Ø 376 mm, width 112 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08