




# Metaspaces

8 215 346 599  
6 × 8,6 W, 6529 lm, 3000 K warm white, Zhaga 18 -  
up / down,  
Street Optic 36° / 155°

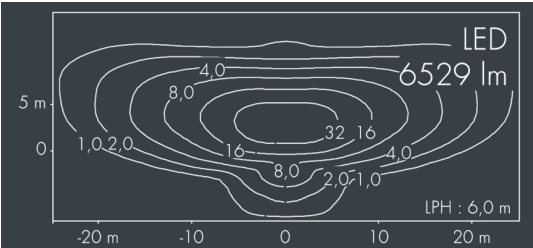

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification

|                       |                         |
|-----------------------|-------------------------|
| Wattage               | 52 W                    |
| Delivered lumens      | 126 lm/W                |
| Light source          | LED 3000 K              |
| Color Rendering Index | CRI > 80                |
| Colour tolerance      | 3                       |
| Lifetime ta 25° C     | L80/B20 > 50.000 h      |
| Control gear          | Zhaga 18 - oben / unten |

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminarie for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, PMMA Linsen, integral driver (AC/DC), CRI > 80, 3, service life L80/B20 > 50.000 h, Beam angle (FWHM): 36° / 155°, luminous flux: 6529 lm, wattage: 52 W, delivered lumens 126 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions: Ø 376 mm, width 112 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

