


Metaspaces High Output

8 218 356 549
6 × 10,8 W, 6072 lm, 3000 K warm white, Zhaga 18 -
up / down,
asymmetrical beam 63°

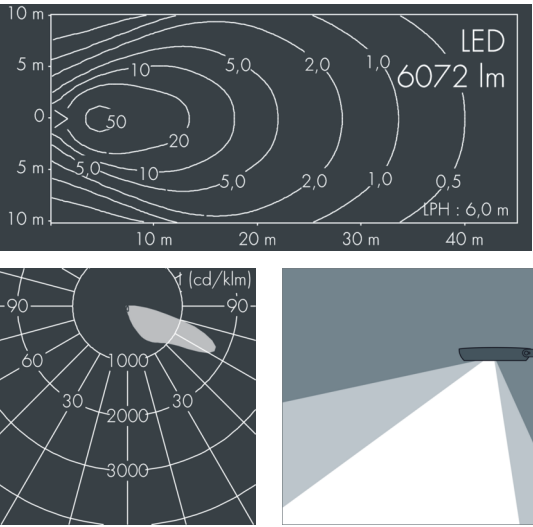

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification

Wattage	65 W
Delivered lumens	93 lm/W
Light source	LED 3000 K
Color Rendering Index	CRI > 80
Colour tolerance	3
Lifetime ta 25° C	L80/B20 > 50.000 h
Control gear	Zhaga 18 - oben / unten
Input voltage AC	220 – 240 V
Input voltage DC	220 – 240 V
Voltage protection	6 kV L/N 10 kV L/PE
Luminaires per B16A / C16A	10 / 16

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12,
polyester powder coated by high-quality and UV-stabilized
coating process, Colour: silver grey , all exterior parts are
stainless steel, tempered high efficiency safety glass, anti-reflective
coating from 1 side, dark screenprint, silicon gasket, closure with
5 stainless steel screws, with pole top fitter for 1 luminaire for
poles Ø 60/76 mm, fastening with 4 set screws M8,
cable gland: M20, with 8 m cable Ho7RN-F3G1,
connecting terminal: 3 pole, highly efficient metallized PC
reflector, integral driver (AC/DC), CRI > 80, 3,
service life L80/B20 > 50.000 h, luminous flux: 6072 lm,
wattage: 65 W, delivered lumens 93 lm/W, protection type
IP65, protection class II, impact resistance IK08, windage area
0,056 m², dimensions (L×H×W): 376 × 112 × 15 mm, weight
5.1 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE mark.

IP65 IK08