
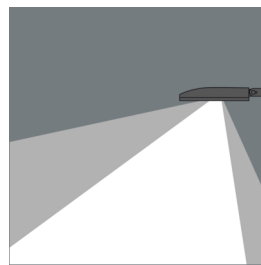



## Monospace High Output

8 251 465 149

8 × 20 W, 18722 lm, 4000 K neutral white, DALI, asymmetrical beam 58°

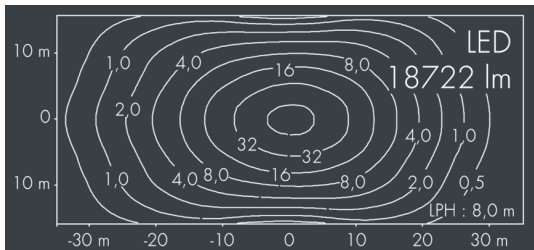

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 2 luminaires for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 2x 8 m cable Ho5RN-F5G1, connecting terminal: 5 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, 3 SCDM, service life L80/B20 > 50.000 h, luminous flux: 18722 lm, wattage: 160 W, delivered lumens 117 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,063 m<sup>2</sup>, dimensions (L×H×W): 924 × 67 × 308 mm, weight 10.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

Wattage	160 W	Housing colour	white RAL 9002
Delivered lumens	117 lm/W	Protection type	IP67
Light source	LED 4000 K	Protection class	I
Color Rendering Index	CRI > 80	Impact resistance	IK08
Colour tolerance	3 SCDM	Windage area	0,063m <sup>2</sup>
Lifetime ta 25° C	L80/B20 > 50.000 h	Dimensions	924 × 67 × 308 mm
Control gear	DALI	Weight	10,30 kg
Input voltage AC	230	Max. ambient temperature ta	35°
Input voltage DC	190 – 250 V		
Voltage protection	6 kV L/N   10 kV L/PE		
Luminaires per B16A / C16A	11 / 19		