
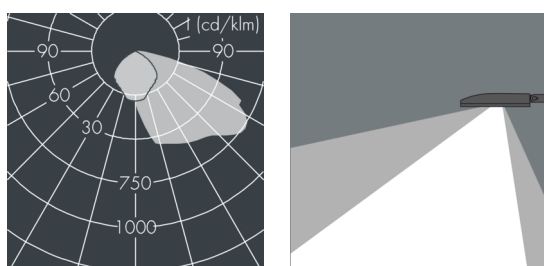


## Monospace

8 252 345 149

4 × 11,5 W, 5899 lm, 4000 K neutral white, DALI, asymmetrical beam 58°

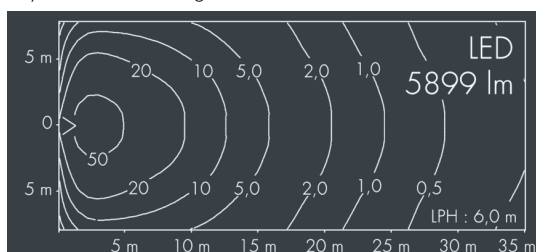

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 8 m cable Ho5RN-F5G1, connecting terminal: 5 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, 3 SCDM, service life L80/B20 > 50.000 h, luminous flux: 5899 lm, wattage: 46 W, delivered lumens 128 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,063 m<sup>2</sup>, dimensions (L×H×W): 362 × 67 × 308 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP67 IK08

## Specification

|                            |                      |                             |                     |
|----------------------------|----------------------|-----------------------------|---------------------|
| Wattage                    | 46 W                 | Housing colour              | black RAL 7021      |
| Delivered lumens           | 128 lm/W             | Power supply cable          | Ø 5 – 14 mm         |
| Light source               | LED 4000 K           | Protection type             | IP67                |
| Color Rendering Index      | CRI > 80             | Protection class            | II                  |
| Colour tolerance           | 3 SCDM               | Impact resistance           | IK08                |
| Lifetime ta 25° C          | L80/B20 > 50.000 h   | Windage area                | 0,063m <sup>2</sup> |
| Control gear               | DALI                 | Dimensions                  | 362 × 67 × 308 mm   |
| Input voltage AC           | 220 – 240 V          | Weight                      | 5,10 kg             |
| Voltage protection         | 3 kV L/N   4 kV L/PE | Max. ambient temperature ta | 35°                 |
| Luminaires per B16A / C16A | 15 / 25              |                             |                     |