



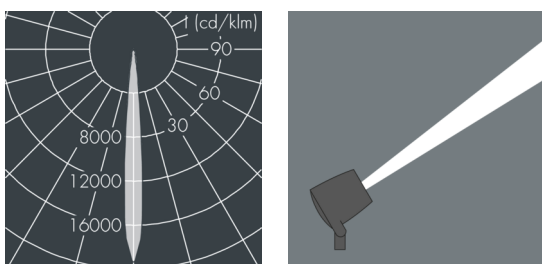

## Monospot 4

8 904 249 019

49 W, 1687 lm, RGBW (3000 K) warm white, DMX, narrow beam 9°

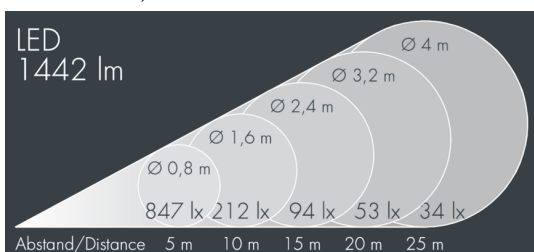

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 6 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (AC/DC), Beam angle (FWHM): 9°, luminous flux: 1687 lm, wattage: 49 W, delivered lumens 34 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,075 m<sup>2</sup>, dimensions:  $\varnothing$  210 mm, width 240 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP67 IK08

## Specification

Wattage	49 W	Beam angle (FWHM)	9°
Delivered lumens	34 lm/W	Housing colour	black RAL 7021
Light source	LED RGBW (3000 K)	Power supply cable	$\varnothing$ 6 - 13 mm
Control gear	DMX	Protection type	IP67
Input voltage AC	120 - 277 V	Protection class	I
Input voltage DC	120 - 250 V	Impact resistance	IK08
Luminaires per B16A / C16A	22 / 22	Windage area	0,075m <sup>2</sup>
		Dimensions	$\varnothing$ 210 mm, width 240 mm
		Weight	5,10 kg
		Max. ambient temperature ta	35°