
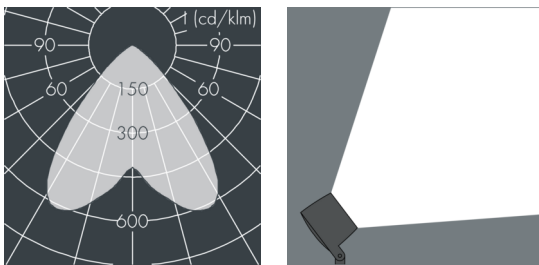


## Monospot S4

8 994 056 159

45 W, 3770 lm, 3000 K warm white, DALI, wide beam (with indirect reflector)

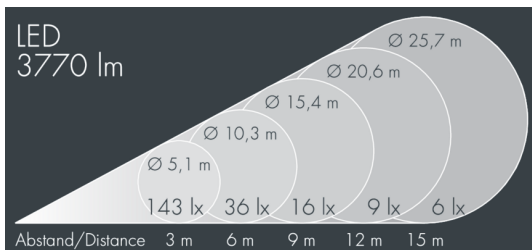

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 30-40 mm, 1 centre hole Ø 17 mm, tilt range: 180°, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80, luminous flux: 3770 lm, wattage: 45 W, delivered lumens 83 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions: Ø 194 mm, width 124 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



## Specification

|                       |            |                   |                        |
|-----------------------|------------|-------------------|------------------------|
| Wattage               | 45 W       | Housing colour    | silver grey            |
| Delivered lumens      | 83 lm/W    | Protection type   | IP67                   |
| Light source          | LED 3000 K | Protection class  | I                      |
| Color Rendering Index | CRI > 80   | Impact resistance | IK08                   |
| Control gear          | DALI       | Dimensions        | Ø 194 mm, width 124 mm |
|                       |            | Weight            | 3,00 kg                |