




## Nightpath

8 304 165 019

5 × 2,5 W, 633 lm, 4000 K neutral white, asymmetrical 88°

L1 = 1000mm

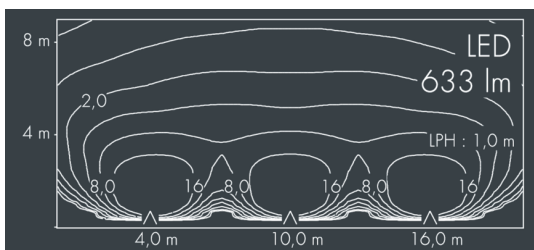

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12 and extruded aluminum post, cast aluminum base plate, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered prismatic safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, connecting terminal: 3 pole, extreme wide beam optical system, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral control gear, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 633 lm, wattage: 13 W, delivered lumens 49 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,18 m<sup>2</sup>, dimensions (L×H×W): 178 × 1000 × 131 mm, weight 8.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP65 IK08

## Specification

Wattage	13 W	Housing colour	white RAL 9002
Delivered lumens	49 lm/W	Power supply cable	Ø 7 – 11 mm
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,18m <sup>2</sup>
Control gear	on / off	Dimensions	178 × 1000 × 131 mm
Input voltage AC	220 – 240 V	Weight	8,70 kg
Input voltage DC	195 – 240 V	Max. ambient temperature ta	40°
Voltage protection	1 kV L/N   2 kV L/PE		
Luminaires per B16A / C16A	37 / 61		