




## Nightpath

8 303 056 009

5 × 2,5 W, 550 lm, 3000 K warm white, asymmetrical 88°

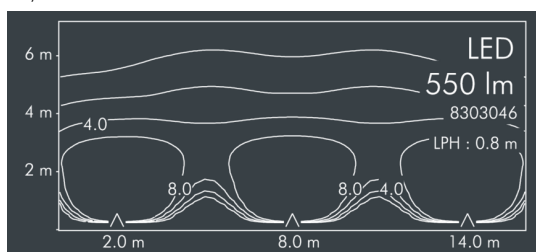

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered prismatic safety glass, anti-reflective coating from 1 side, silicon gasket, with 4 stainless steel screws, with stainless steel braces for installation in cavity walls (wall thickness 9-55 mm), cut-out 165 × 165 mm, cable gland: 2 cable glands, connecting terminal: 3 pole, extreme wide beam optical system, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral control gear, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 88°, luminous flux: 550 lm, wattage: 13 W, delivered lumens 42 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions (L×H×W): 180 × 180 × 5 mm, weight 2.017 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP65 IK08

## Specification

|                            |                      |                             |                  |
|----------------------------|----------------------|-----------------------------|------------------|
| Wattage                    | 13 W                 | Beam angle (FWHM)           | 88°              |
| Delivered lumens           | 42 lm/W              | Housing colour              | silver grey      |
| Light source               | LED 3000 K           | Power supply cable          | Ø 7 – 11 mm      |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65             |
| Colour tolerance           | max 2 SDCM           | Protection class            | I                |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK08             |
| Control gear               | on / off             | Dimensions                  | 180 × 180 × 5 mm |
| Input voltage AC           | 220 – 240 V          | Weight                      | 2,02 kg          |
| Input voltage DC           | 195 – 240 V          | Max. ambient temperature ta | 40°              |
| Voltage protection         | 1 kV L/N   2 kV L/PE |                             |                  |
| Luminaires per B16A / C16A | 37 / 61              |                             |                  |