



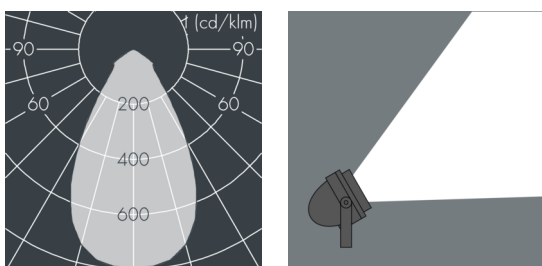

## Nightspot B

8 952 256 009

For ceramic metal halide lamps (HIT-CE)

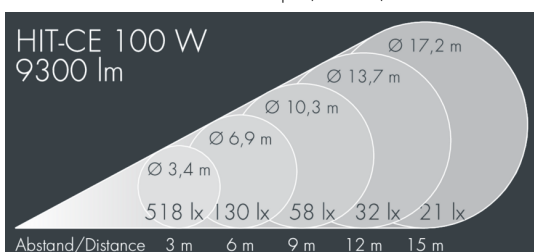

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles  $\varnothing$  60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes  $\varnothing$  9mm, spacing 105mm, 1 centre hole  $\varnothing$  22mm, tilt range:  $80^\circ$ , cable gland: M20, connecting terminal: 3 pole, highly efficient anodized aluminum reflector, with built-in secondary reflector (narrow beam/medium wide beam) for optimal visual comfort and high efficiency, for glare control and reduction of spill light, integral ballast and ignitor, LPF, HPF available on request, Beam angle (FWHM):  $60^\circ$ , luminous flux: 9300 lm, wattage: 100 W, delivered lumens 85 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,05 m<sup>2</sup>, dimensions:  $\varnothing$  194 mm, width 100 mm, weight 6.2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

|                  |          |                    |                                    |
|------------------|----------|--------------------|------------------------------------|
| Wattage          | 100 W    | Beam angle (FWHM)  | $60^\circ$                         |
| Delivered lumens | 85 lm/W  | Housing colour     | silver grey                        |
| Control gear     | on / off | Power supply cable | $\varnothing$ 8 – 15 mm            |
|                  |          | Protection type    | IP65                               |
|                  |          | Protection class   | I                                  |
|                  |          | Impact resistance  | IK08                               |
|                  |          | Windage area       | 0,05m <sup>2</sup>                 |
|                  |          | Dimensions         | $\varnothing$ 194 mm, width 100 mm |
|                  |          | Weight             | 6,20 kg                            |