





Nightspot B

8 986 269 039

7 × 1,5 W, 847 lm, RGBW (4000 K) neutral white, DMX, elliptical beam spread 24° / 47°

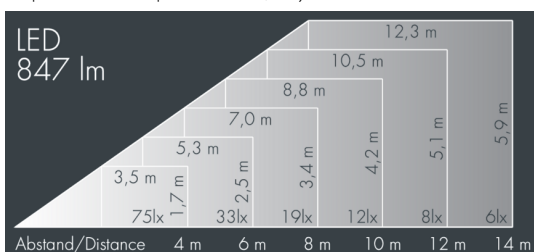

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles $\varnothing 60-100$ mm, adjustable aluminum mounting base, powder coated: 2 drilled holes $\varnothing 9$ mm, spacing 105mm, 1 centre hole $\varnothing 22$ mm, tilt range: 80°, cable gland: M20, connecting terminal: 6 pole, highly efficient optics with light conductor technology for precise lighting tasks and colour mixing within the luminaire, integral driver (AC/DC), service life $L_{70}/B_{20} > 50.000$ h, Beam angle (FWHM): 24° / 47°, luminous flux: 847 lm, wattage: 42 W, delivered lumens 20 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,05 m², dimensions: $\varnothing 240$ mm, width 260 mm, weight 5,8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

Wattage	42 W	Beam angle (FWHM)	24° / 47°
Delivered lumens	20 lm/W	Housing colour	white RAL 9002
Light source	LED RGBW (4000 K)	Power supply cable	$\varnothing 6 - 10$ mm
Lifetime ta 25° C	$L_{70}/B_{20} > 50.000$ h	Protection type	IP67
Control gear	DMX	Protection class	I
Input voltage AC	120 – 250 V	Impact resistance	IK08
Input voltage DC	120 – 250 V	Windage area	0,05m ²
Voltage protection	1 kV L/N 2 kV L/PE	Dimensions	$\varnothing 240$ mm, width 260 mm
		Weight	5,80 kg
		Max. ambient temperature ta	45°