
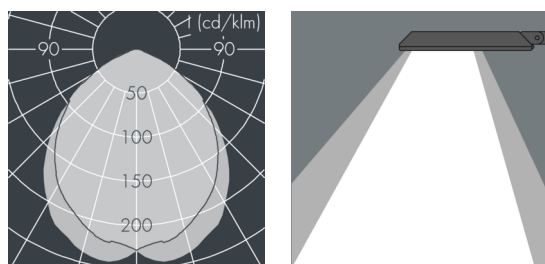


## Wall mount luminaire

8 894 051 009

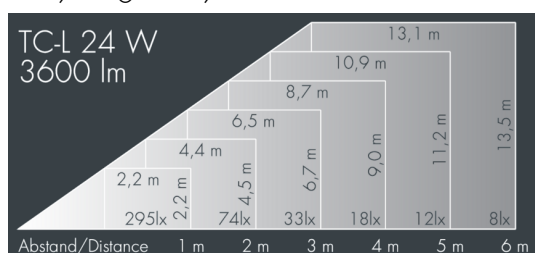

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, polyester powder coated stainless steel release fastener, wall mounting plate: 2 drilled holes  $\varnothing$  8.5 mm, spacing 120 mm, tilt range:  $90^\circ$ , cable gland: PG 13,5, connecting terminal: 3 pole, axially symmetrical high gloss aluminum reflector, integral starter and ballast, LPF, HPF available on request, Beam angle (FWHM):  $96^\circ / 95^\circ$ , luminous flux: 3600 lm, wattage: 60 W, delivered lumens 60 lm/W, protection type IP54, protection class I, windage area 0,12 m<sup>2</sup>, dimensions (L×H×W): 605 × 77 × 210 mm, weight 4.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP 54

## Specification

Wattage	60 W	Beam angle (FWHM)	$96^\circ / 95^\circ$
Delivered lumens	60 lm/W	Housing colour	silver grey
Control gear	on / off	Protection type	IP54
		Protection class	I
		Windage area	0,12 m <sup>2</sup>
		Dimensions	605 × 77 × 210 mm
		Weight	4,30 kg