




## Uplight 135

8 658 016 049

3 W, 124 lm, 3000 K warm white, medium wide beam, adjustable 13°

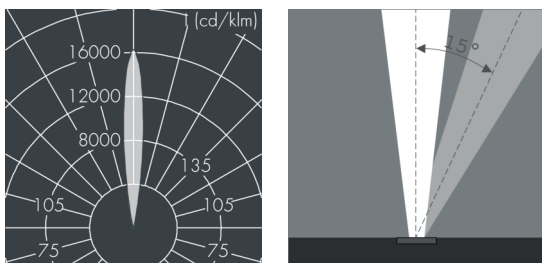

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing of corrosion-resistant die-cast aluminum AlSi12, double polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass flush with frame, anti-reflective coating from 1 side, dark screenprint, for loads up to max. 5000 kg (according to IEC / EN 60598-2-13), silicon gasket, cover and closure with 3 stainless steel screws, in combination with installation sleeve 126 0 160 060, cable gland: M20, connecting terminal: 3 pole, highly efficient anodized rotationally symmetrical reflector, lockable, tilt range: 0-15, 0,8 m cable HO5RN-F3G1, integral driver (AC/DC), CRI > 80, max 2 SCDM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 13°, luminous flux: 124 lm, wattage: 3 W, delivered lumens 41 lm/W, protection type IP67, protection class I, impact resistance IK10, dimensions: Ø 135 mm, width 131 mm, weight 1.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK10

## Specification

|                       |                    |                             |                        |
|-----------------------|--------------------|-----------------------------|------------------------|
| Wattage               | 3 W                | Beam angle (FWHM)           | 13°                    |
| Delivered lumens      | 41 lm/W            | Housing colour              | black RAL 7021         |
| Light source          | LED 3000 K         | Power supply cable          | Ø 6 – 13 mm            |
| Color Rendering Index | CRI > 80           | Protection type             | IP67                   |
| Colour tolerance      | max 2 SCDM         | Protection class            | I                      |
| Lifetime ta 25° C     | L90/B10 > 50.000 h | Impact resistance           | IK10                   |
| Control gear          | on / off           | Dimensions                  | Ø 135 mm, width 131 mm |
| Input voltage AC      | 90 – 295 V         | Weight                      | 1,60 kg                |
| Input voltage DC      | 120 – 415 V        | Max. ambient temperature ta | 41°                    |