

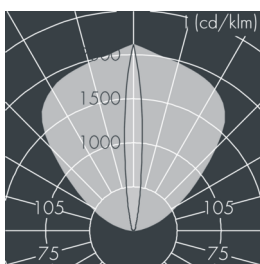


## Upline linear

8 612 045 009

12 × 2,5 W, 1444 lm, 4000 K neutral white,  
wall washer 10° / 99°

L1 = 635 mm, L2 = 695 mm

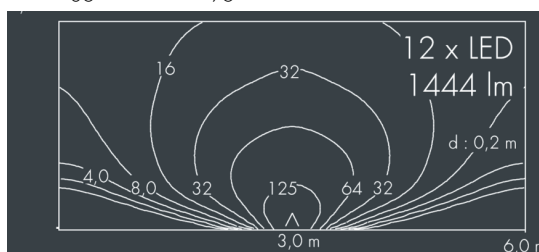

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, double polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass flush with frame, anti-reflective coating from 1 side, for loads up to max. 5000 kg (according to IEC / EN 60598-2-13), silicon gasket, stainless steel cover frame and closure with stainless steel screws, with stainless steel coupling, cable gland: M20 (stainless steel), connecting terminal: 3 pole, integral control gear, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 10° / 99°, luminous flux: 1444 lm, wattage: 26 W, delivered lumens 56 lm/W, protection type IP67, protection class I, impact resistance IK09, dimensions (L×H×W): 635 × 99 × 122 mm, weight 7.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK09

## Specification

|                       |                      |                    |                   |
|-----------------------|----------------------|--------------------|-------------------|
| Wattage               | 26 W                 | Beam angle (FWHM)  | 10° / 99°         |
| Delivered lumens      | 56 lm/W              | Housing colour     | black RAL 7021    |
| Light source          | LED 4000 K           | Power supply cable | Ø 6 – 13 mm       |
| Color Rendering Index | CRI > 80             | Protection type    | IP67              |
| Colour tolerance      | max 2 SDCM           | Protection class   | I                 |
| Lifetime ta 25° C     | L90/B10 > 50.000 h   | Impact resistance  | IK09              |
| Control gear          | on / off             | Dimensions         | 635 × 99 × 122 mm |
| Input voltage AC      | 220 – 240 V          | Weight             | 7,70 kg           |
| Voltage protection    | 2 kV L/N   4 kV L/PE |                    |                   |