


Upline linear

8 612 045 009
12 x 2,5 W, 1444 lm, 4000 K neutral white,
wall washer 10° / 99°
L1 = 635 mm, L2 = 695 mm

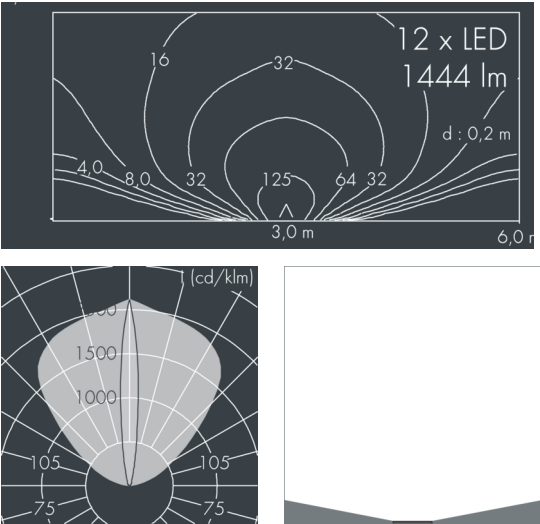

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, double polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass flush with frame, anti-reflective coating from 1 side, for loads up to max. 5000 kg (according to IEC / EN 60598-2-13), silicon gasket, stainless steel cover frame and closure with stainless steel screws, with stainless steel coupling, cable gland: M20 (stainless steel), connecting terminal: 3 pole, integral control gear, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 10° / 99°, luminous flux: 1444 lm, wattage: 26 W, delivered lumens 56 lm/W, protection type IP67, protection class I, impact resistance IK09, dimensions (LxHxW): 635 x 99 x 122 mm, weight 7.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



Specification

Wattage	26 W	Beam angle (FWHM)	10° / 99°
Delivered lumens	56 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Power supply cable	Ø 6 – 13 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK09
Control gear	on / off	Dimensions	635 x 99 x 122 mm
Input voltage AC	220 – 240 V	Weight	7,70 kg
Voltage protection	2 kV L/N 4 kV L/PE		