
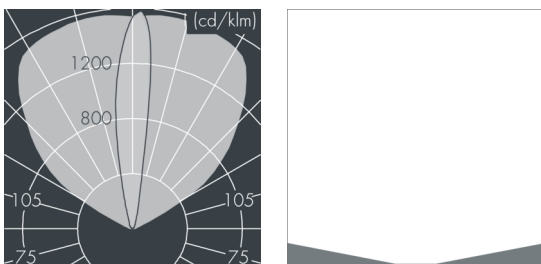


## Upline 600

8 650 016 209

6 × 2,5 W, 1059 lm, 3000 K warm white, 1-10V,  
wall washer 12° / 108°

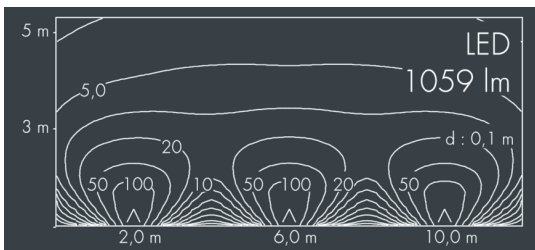

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, double polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass flush with frame, anti-reflective coating from 1 side, design element with dark screen print, for loads up to max. 2000 kg (according to IEC / EN 60598-2-13), silicon gasket, cover frame and closure with 2 stainless steel screws, with polypropylene recess housing, cable gland: M20 (stainless steel), connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, with 1 m cable HO7RN-F3G1, integral potted driver (DALI), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 12° / 108°, luminous flux: 1059 lm, wattage: 15 W, delivered lumens 71 lm/W, protection type IP67, protection class I, impact resistance IK10, dimensions (L×H×W): 648 × 99 × 84 mm, weight 3.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK10

## Specification

|                            |                      |                             |                  |
|----------------------------|----------------------|-----------------------------|------------------|
| Wattage                    | 15 W                 | Beam angle (FWHM)           | 12° / 108°       |
| Delivered lumens           | 71 lm/W              | Housing colour              | black RAL 7021   |
| Light source               | LED 3000 K           | Protection type             | IP67             |
| Color Rendering Index      | CRI > 80             | Protection class            | I                |
| Colour tolerance           | max 2 SDCM           | Impact resistance           | IK10             |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Dimensions                  | 648 × 99 × 84 mm |
| Control gear               | 1-10V                | Weight                      | 3,60 kg          |
| Input voltage AC           | 100 – 240 V          | Max. ambient temperature ta | 45°              |
| Input voltage DC           | 195 – 255 V          |                             |                  |
| Voltage protection         | 2 kV L/N   4 kV L/PE |                             |                  |
| Luminaires per B16A / C16A | 50 / 85              |                             |                  |