




Monospot Gobo

8 905 046 059

55 W, 1066 lm, 3000 K warm white,
63 mm focal length 29°

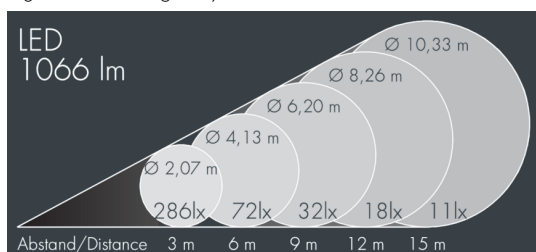

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket powder coated aluminum with tilt scale: 2 drilled holes Ø 7 mm, spacing 40 - 60 mm, 1 centre hole Ø 21 mm, tilt range: 180°, cable gland: M20, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 29°, luminous flux: 1066 lm, wattage: 55 W, delivered lumens 19 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m², dimensions: Ø 215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage | 55 W | Beam angle (FWHM) | 29° |
| Delivered lumens | 19 lm/W | Housing colour | black RAL 7021 |
| Light source | LED 3000 K | Power supply cable | Ø 6 – 13 mm |
| Color Rendering Index | CRI > 80 | Protection type | IP65 |
| Control gear | on / off | Protection class | I |
| Input voltage AC | 220 – 240 V | Impact resistance | IK08 |
| Voltage protection | 2 kV L/N 4 kV L/PE | Windage area | 0,076m ² |
| Luminaires per B16A / C16A | 23 / 39 | Dimensions | Ø 215 mm, width 390 mm |
| | | Weight | 8,00 kg |
| | | Max. ambient temperature ta | 35° |