






Nightspot B

8 986 265 119

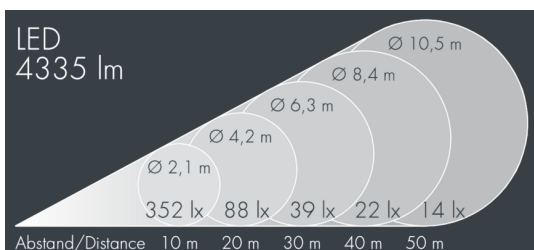

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles \varnothing 60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes \varnothing 9mm, spacing 105mm, 1 centre hole \varnothing 22mm, tilt range: 80° , cable gland: M20, connecting terminal: 5 pole, highly efficient anodized aluminum reflector, with built-in secondary reflector (narrow beam/medium wide beam) for optimal visual comfort and high efficiency, for glare control and reduction of spill light, integral, dimmable driver (DALI), CRI > 80, max 2 SDCM, service life $L_{90}/B_{10} > 50.000$ h, Beam angle (FWHM): 12° , luminous flux: 4335 lm, wattage: 54 W, delivered lumens 80 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,05 m², dimensions: \varnothing 240 mm, width 260 mm, weight 4.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

IP 67 IK 08

Specification

| | | | |
|----------------------------|----------------------------|-----------------------------|------------------------------------|
| Wattage | 54 W | Beam angle (FWHM) | 12° |
| Delivered lumens | 80 lm/W | Housing colour | white RAL 9002 |
| Light source | LED 4000 K | Power supply cable | \varnothing 6 – 10 mm |
| Color Rendering Index | CRI > 80 | Protection type | IP67 |
| Colour tolerance | max 2 SDCM | Protection class | I |
| Lifetime ta 25° C | $L_{90}/B_{10} > 50.000$ h | Impact resistance | IK08 |
| Control gear | DALI | Windage area | 0,05m ² |
| Input voltage AC | 220 – 240 V | Dimensions | \varnothing 240 mm, width 260 mm |
| Input voltage DC | 195 – 255 V | Weight | 4,90 kg |
| Voltage protection | 4 kV L/N 2 kV L/PE | Max. ambient temperature ta | 35° |
| Luminaires per B16A / C16A | 27 / 46 | | |