




## Ecoline Mini

8 766 346 189

15 × 1,8 W, 1380 lm, 3000 K warm white, DALI, asymmetrical 30°

L1 = 1550 mm, L2 = 1513 mm

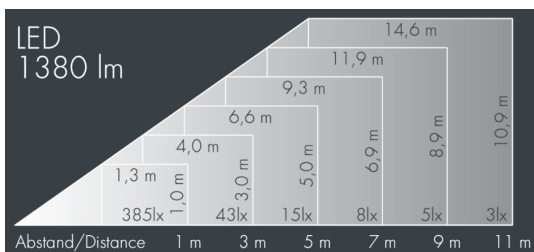

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L2, tilt range: 220°, cable gland:

M16, with 1 m cable gland ÖLFLEX Robust 210 5G1, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral, dimmable driver (DALI), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 1380 lm, wattage: 26 W, delivered lumens 53 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,059 m<sup>2</sup>, dimensions (L×H×W): 1550 × 43 × 40 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK10

## Specification

Wattage	26 W	Housing colour	black RAL 7021
Delivered lumens	53 lm/W	Power supply cable	Ø 5 – 9 mm
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,059m <sup>2</sup>
Control gear	DALI	Dimensions	1550 × 43 × 40 mm
Input voltage AC	220 – 240 V	Weight	3,00 kg
Input voltage DC	195 – 240 V	Max. ambient temperature ta	50°
Voltage protection	2 kV L/N   4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		