
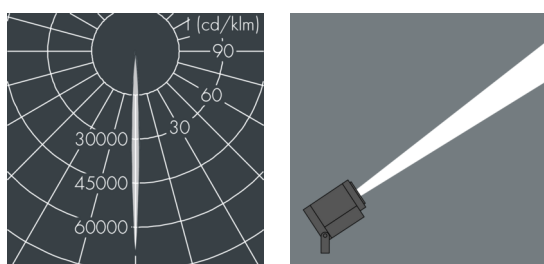


## Ecospot Mini

8 980 045 019

3 W, 157 lm, 4000 K neutral white,  
narrow beam 4°

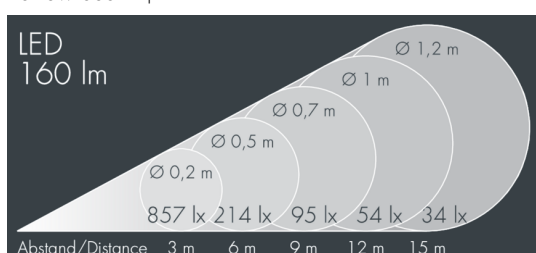

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 3 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes  $\varnothing$  7 mm, spacing 30 mm, 1 centre hole  $\varnothing$  8.5 mm, tilt range:  $140^\circ$ , cable gland: M20, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (AC/DC), 80, max 2 SDCM, service life  $L_{90/B_{10}} > 50.000$  h, Beam angle (FWHM):  $4^\circ$ , luminous flux: 157 lm, wattage: 3 W, delivered lumens 52 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,01 m<sup>2</sup>, dimensions:  $\varnothing$  75 mm, width 125 mm, weight 0.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

Wattage	3 W	Beam angle (FWHM)	$4^\circ$
Delivered lumens	52 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Power supply cable	$\varnothing$ 6 – 13 mm
Color Rendering Index	80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta $25^\circ$ C	$L_{90/B_{10}} > 50.000$ h	Impact resistance	IK08
Control gear	on / off	Windage area	0,01m <sup>2</sup>
Input voltage AC	100 – 240 V	Dimensions	$\varnothing$ 75 mm, width 125 mm
Input voltage DC	134 – 335 V	Weight	0,80 kg
Voltage protection	1 kV L/N   1 kV L/PE	Max. ambient temperature ta	$40^\circ$
Luminaires per B16A / C16A	157 / 317		