



## Fluxa B

8 276 050 009

For high pressure sodium vapour lamps (HST-DE)

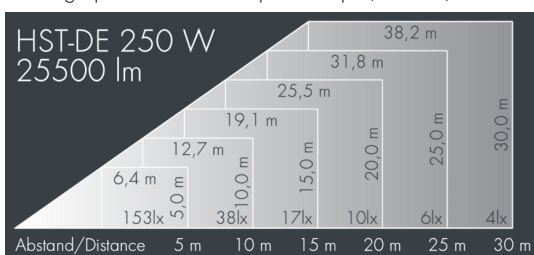

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 4 holes  $\varnothing$  8.5 mm, spacing 70 mm (120 mm), 2 drilled holes  $\varnothing$  10 mm, spacing 200 mm, 1 centre hole  $\varnothing$  22 mm, tilt range:  $210^\circ$ , cable gland: M20, connecting terminal: 3 pole, high gloss asymmetrical aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, luminous flux: 25500 lm, wattage: 250 W, delivered lumens 94 lm/W, protection type IP54, protection class I, impact resistance IK09, windage area 0,17 m<sup>2</sup>, dimensions (L×H×W): 590 × 185 × 335 mm, weight 14.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP 54 IK09

## Specification

Wattage	250 W	Housing colour	silver grey
Delivered lumens	94 lm/W	Power supply cable	$\varnothing$ 8 – 15 mm
Control gear	on / off	Protection type	IP54
		Protection class	I
		Impact resistance	IK09
		Windage area	0,17m <sup>2</sup>
		Dimensions	590 × 185 × 335 mm
		Weight	14,10 kg