



Fluxa Mini

8 290 056 079

36 W, 3157 lm, 3000 K warm white,
wide beam

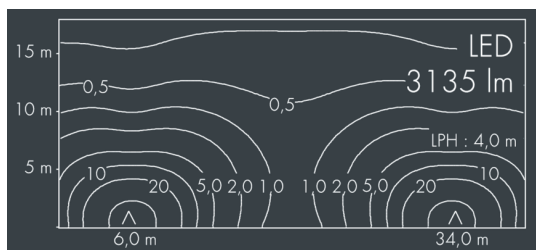

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, with prismatic glass for reduced glare, silicon gasket, closure with 4 stainless steel screws, mounting bracket powder coated aluminum with tilt scale: 4 drilled holes \varnothing 8.5 mm, spacing 70 mm (120 mm), 1 centre hole \varnothing 17 mm, tilt range: 210° , cable gland: M16, connecting terminal: 3 pole, highly efficient anodized rotationally symmetrical reflector with matt finish, integral driver (AC/DC), CRI > 70, luminous flux: 3157 lm, wattage: 36 W, delivered lumens 88 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,047 m², dimensions (L×H×W): 250 × 89 × 185 mm, weight 2.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage | 36 W | Housing colour | silver grey |
| Delivered lumens | 88 lm/W | Power supply cable | \varnothing 7 – 9 mm |
| Light source | LED 3000 K | Protection type | IP65 |
| Color Rendering Index | CRI > 70 | Protection class | I |
| Control gear | on / off | Impact resistance | IK08 |
| Input voltage AC | 220 – 240 V | Windage area | 0,047m ² |
| Input voltage DC | 195 – 250 V | Dimensions | 250 × 89 × 185 mm |
| Voltage protection | 2 kV L/N 4 kV L/PE | Weight | 2,30 kg |
| Luminaires per B16A / C16A | 50 / 85 | Max. ambient temperature ta | 35° |