




Minispot 1 - 48 V

8 924 056 129

2 W, 142 lm, 3000 K warm white, DALI,
linear vertical 52° / 7°

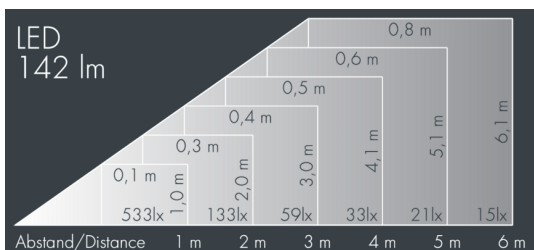

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole \varnothing 7 mm, spacing 12 mm, 1 center hole \varnothing 8.5 mm, tilt range: 185°, cable gland: M16, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, Constant current control (48 V DC), CRI > 80, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 52° / 7°, luminous flux: 142 lm, wattage: 2 W, delivered lumens 71 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,006 m², dimensions: \varnothing 58 mm, width 92 mm, weight 0.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|-----------------------|--------------------|-----------------------------|----------------------------------|
| Wattage | 2 W | Beam angle (FWHM) | 52° / 7° |
| Delivered lumens | 71 lm/W | Housing colour | silver grey |
| Light source | LED 3000 K | Protection type | IP65 |
| Color Rendering Index | CRI > 80 | Protection class | III |
| Colour tolerance | 3 | Impact resistance | IK08 |
| Lifetime to 25° C | L90/B10 > 50.000 h | Windage area | 0,006m ² |
| Control gear | DALI | Dimensions | \varnothing 58 mm, width 92 mm |
| | | Weight | 0,50 kg |
| | | Max. ambient temperature to | 40° |