
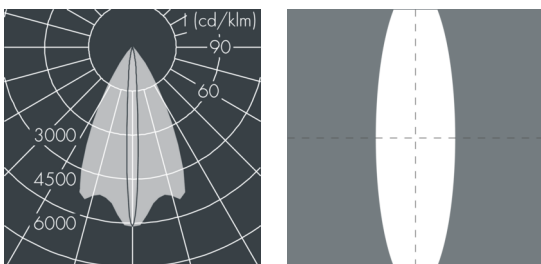


## Minispot 1 - 48 V

8 924 057 029

2 W, 134 lm, 2700 K warm white,  
linear vertical 52° / 7°

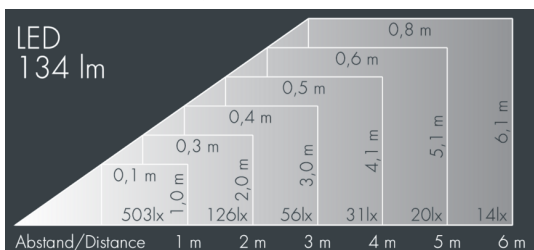

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole  $\varnothing$  7 mm, spacing 12 mm, 1 center hole  $\varnothing$  8.5 mm, tilt range: 185°, cable gland: M16, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, Constant current control (48 V DC), CRI > 80, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 52° / 7°, luminous flux: 134 lm, wattage: 2 W, delivered lumens 67 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,006 m<sup>2</sup>, dimensions:  $\varnothing$  58 mm, width 92 mm, weight 0.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK08

## Specification

Wattage	2 W	Beam angle (FWHM)	52° / 7°
Delivered lumens	67 lm/W	Housing colour	silver grey
Light source	LED 2700 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	III
Colour tolerance	3	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,006m <sup>2</sup>
Control gear	on / off	Dimensions	$\varnothing$ 58 mm, width 92 mm
Input voltage DC	24 – 48 V	Weight	0,50 kg
		Max. ambient temperature ta	40°