



## Minispot 2 - 48 V

8 925 056 029

8 W, 506 lm, 3000 K warm white,  
linear vertical 34° / 7°

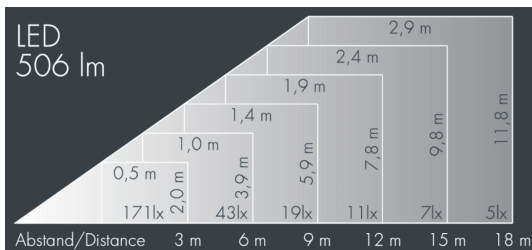

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole Ø 7 mm, spacing 18 mm, 1 center hole Ø 8.5 mm, tilt range: 185°, cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, Radial louvre, Constant current control (48 V DC), CRI > 80, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 34° / 7°, luminous flux: 506 lm, wattage: 8 W, delivered lumens 63 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,01 m<sup>2</sup>, dimensions: Ø 80 mm, width 121 mm, weight 0.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK08

## Specification

Wattage	8 W	Beam angle (FWHM)	34° / 7°
Delivered lumens	63 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	Ø 6 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	3	Protection class	III
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,01m <sup>2</sup>
Input voltage DC	48	Dimensions	Ø 80 mm, width 121 mm
		Weight	0,80 kg
		Max. ambient temperature ta	35°