





Minispot 2 - 48 V

8 925 066 319

9 W, 549 lm, 3000 K warm white, Casambi, narrow beam 6°

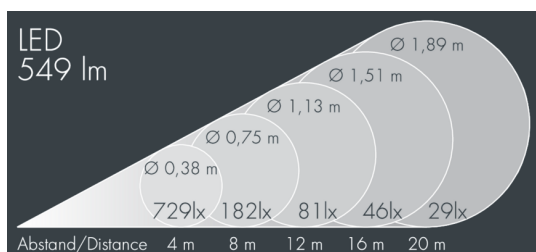

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole Ø 7 mm, spacing 18 mm, 1 center hole Ø 8.5 mm, tilt range: 185°, cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, Radial louvre, Constant current control (48 V DC), 81, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 6°, luminous flux: 549 lm, wattage: 9 W, delivered lumens 61 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,01 m², dimensions: Ø 80 mm, width 121 mm, weight 0.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK08

Specification

| | | | |
|-----------------------|--------------------|-----------------------------|-----------------------|
| Wattage | 9 W | Beam angle (FWHM) | 6° |
| Delivered lumens | 61 lm/W | Housing colour | white RAL 9002 |
| Light source | LED 3000 K | Power supply cable | Ø 6 – 11 mm |
| Color Rendering Index | 81 | Protection type | IP65 |
| Colour tolerance | 3 | Protection class | III |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Impact resistance | IK08 |
| Control gear | Casambi | Windage area | 0,01m ² |
| Input voltage DC | 48 | Dimensions | Ø 80 mm, width 121 mm |
| | | Weight | 0,80 kg |
| | | Max. ambient temperature ta | 35° |