
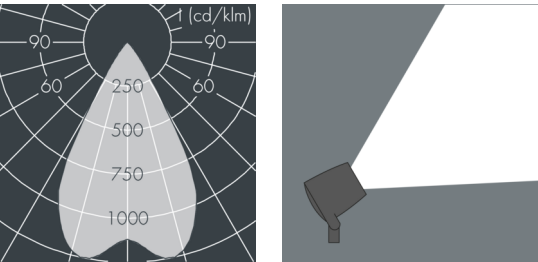


Monospot 4

8 904 262 159
46 W, 2703 lm, 2700 K – 6500 K tunable white DALI,
wide beam 57°

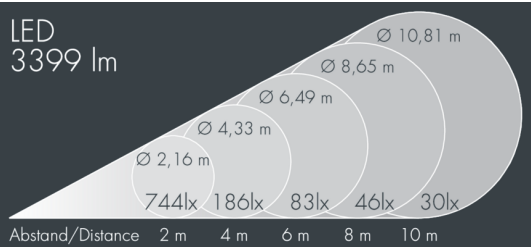

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, Colour: white RAL 9002, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80 / >70, Beam angle (FWHM): 57°, luminous flux: 2703 lm, wattage: 46 W, delivered lumens 59 – 74 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,075 m², dimensions: Ø 210 mm, width 240 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 67 IK 08

Specification

| | | | |
|-----------------------|---------------------|-----------------------------|------------------------|
| Wattage | 46 W | Beam angle (FWHM) | 57° |
| Delivered lumens | 59 – 74 lm/W | Housing colour | white RAL 9002 |
| Light source | LED 2700 K – 6500 K | Power supply cable | Ø 6 – 13 mm |
| Color Rendering Index | CRI > 80 / >70 | Protection type | IP67 |
| Control gear | DALI | Protection class | I |
| | | Impact resistance | IK08 |
| | | Windage area | 0,075m² |
| | | Dimensions | Ø 210 mm, width 240 mm |
| | | Weight | 5,10 kg |
| | | Max. ambient temperature ta | 35° |