



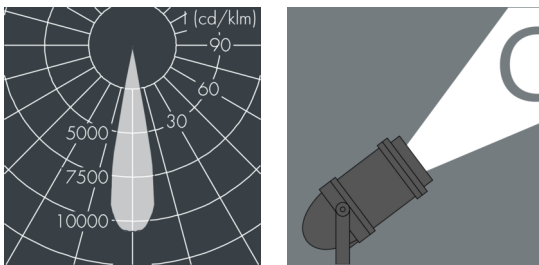

## Nightspot B Gobo Projector

8 987 264 149

55 W, 1680 lm, 6500 K cold white, DALI,  
85 mm focal length 22°

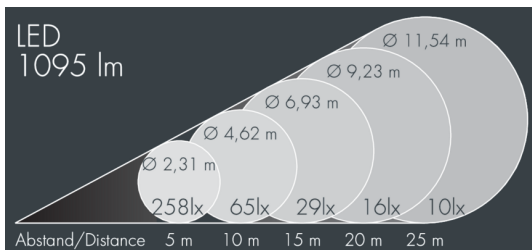

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes Ø 9mm, tilt range: 80°, cable gland: M20, connecting terminal: 5 pole, tilt range: 180°, focusable projection lens for precise light control and sharp-edged image projections, integral, dimmable driver (DALI), CRI > 70, Beam angle (FWHM): 22°, luminous flux: 1680 lm, wattage: 55 W, delivered lumens 31 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,085 m², dimensions: Ø 240 mm, width 425 mm, weight 7.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

Wattage	55 W	Beam angle (FWHM)	22°
Delivered lumens	31 lm/W	Housing colour	white RAL 9002
Light source	LED 6500 K	Power supply cable	Ø 6 – 10 mm
Color Rendering Index	CRI > 70	Protection type	IP67
Control gear	DALI	Protection class	I
Input voltage AC	220 – 240 V	Impact resistance	IK08
Input voltage DC	220 – 240 V	Windage area	0,085m²
Voltage protection	2 kV L/N   4 kV L/PE	Dimensions	Ø 240 mm, width 425 mm
Luminaires per B16A / C16A	23 / 39	Weight	7,80 kg
		Max. ambient temperature ta	35°